




AUDIOTONE[®]

***** PROFESSIONAL

CATALOUGE

2026

Think Music **Think** Audiotone.

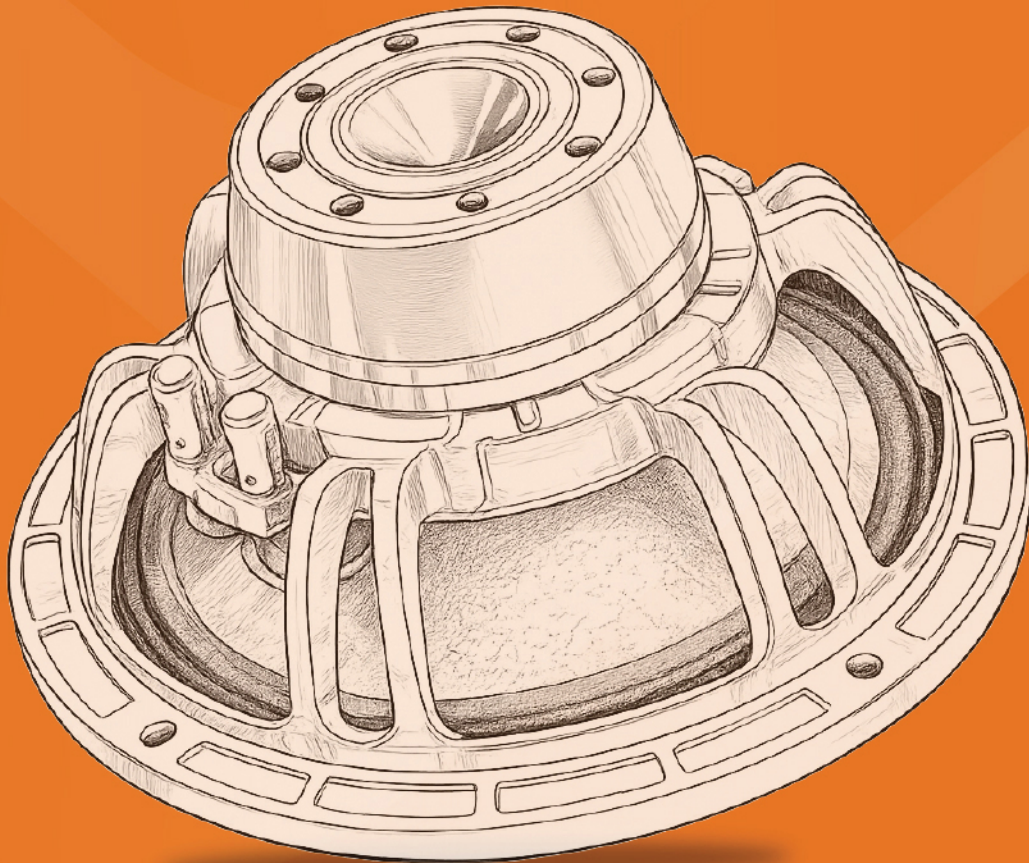

ATOMIC SERIES

15X1025YX



Max Power
2100W

Voice Coil
4" (99.2mm)

Sensitivity
98±2dB

Frequency Range
45Hz-3kHz

Nominal Diameter	15" (393mm)
Impedance	8Ω / 5.3Ω
Power RMS	1050W
Magnet	220*110*25/Y35
Basket Material	Aluminum
Gross Weight	12.9KG

15X1255YX



Max Power
2500W

Voice Coil
4.5" (114.5mm)

Sensitivity
98±2dB

Frequency Range
35Hz-2kHz

Nominal Diameter	15" (393mm)
Impedance	8Ω / 5.1Ω
Power RMS	1250W
Magnet	253*140*25/Y35
Basket Material	Aluminum
Gross Weight	16.5KG

18X2125YX



Max Power
4200 W

Voice Coil
127mm / 5"

Sensitivity
97 ± 2dB

Frequency Range
35Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.2 Ω
Power RMS	2100 W
Magnet	280*140*25/ Y35
Basket Material	Aluminum
Net Weight	20.3 Kg.

18X2530YX



Max Power
5000 W

Voice Coil
127mm / 5"

Sensitivity
97.5 ± 2dB

Frequency Range
35Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.2 Ω
Power RMS	2500 W
Magnet	280x140x50/ Y35
Basket Material	Aluminum
Gross Weight	26.9 Kg.

AD-18N127XY



Max Power

4400 W

Voice Coil

127mm / 5"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.2 Ω
Power RMS	2200 W
Magnet	120*50*15 / N45
Basket Material	Aluminum
Gross Weight	12.9 Kg.

AD-18X2335YX



Max Power

4700 W

Voice Coil

135mm / 5.5"

Sensitivity

98 ± 2dB

Frequency Range

30Hz ~ 1500Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.3 Ω
Power RMS	2350 W
Magnet	300*170*25/ Y35
Basket Material	Aluminum
Gross Weight	23.4 Kg.

AD-18X2740YX



Max Power

5500 W

Voice Coil

135mm / 5.5"

Sensitivity

98.5 ± 2dB

Frequency Range

30Hz ~ 1500Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.3 Ω
Power RMS	2750 W
Magnet	300*170*50/ Y35
Basket Material	Aluminum
Net Weight	30.9 Kg.

AD-18X2645YX



Max Power

5200 W

Voice Coil

152 mm / 6"

Sensitivity

98.5 ± 2dB

Frequency Range

30Hz ~ 1500Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.3 Ω
Power RMS	2600 W
Magnet	330*170*25/ Y35
Basket Material	Aluminum
Gross Weight	27.8 Kg.

AD-18X3155YX

DOUBLE
MAGNET

**Max Power**

6200 W

Voice Coil

152mm / 6"

Sensitivity

98.5 ± 2dB

Frequency Range

30Hz ~ 1500Hz

Nominal Diameter	18" / 465 mm	Magnet	330*170*50 / Y35
Impedance	8 Ω / 5.3 Ω	Basket Material	Aluminum
Power RMS	3100 W	Gross Weight	37.5 Kg.

EXCLUSIVE SERIES

AD-15X830ES

**Max Power**

1600W

Voice Coil

100mm / 4"

Sensitivity

96 ± 2dB

Frequency Range

42Hz ~ 2000Hz

Nominal Diameter	15" / 402 mm
Impedance	8 Ω
Power RMS	800W
Magnet	220x110x25 mm
Basket Material	Aluminum
Net Weight	12.6 kg

AD-15X410ES

**Max Power**

800 W

Voice Coil

75.8mm / 3"

Sensitivity

97 ± 2dB

Frequency Range

45Hz ~ 3000Hz

Nominal Diameter	15" / 393 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	400 W
Magnet	190*85*20 / Y35
Basket Material	Aluminum
Gross Weight	7.4 Kg.

AD-15X1020ES



Max Power

2000 W

Voice Coil

99.2mm / 4"

Sensitivity

98 ± 2dB

Frequency Range

45Hz ~ 3000Hz

Nominal Diameter	15" / 393 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	1000 W
Magnet	220*110*25/ Y35
Basket Material	Aluminum
Gross Weight	12.8 Kg.

AD-15X1250ES



Max Power

2400 W

Voice Coil

4.5" / 114.5mm

Sensitivity

97dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	15" / 393mm
Impedance	8 Ω / 5.4 Ω
Power RMS	1200 W
Magnet	253*140*25/ Y35
Basket Material	Aluminum
Gross Weight	17.9 Kg.

AD-15X1030ES



Max Power

2000 W

Voice Coil

4" in

Sensitivity

96dB

Frequency Range

42Hz ~ 2000Hz

Nominal Diameter	15" / 402mm
Impedance	8 Ω
Power RMS	1000 W
Magnet	220*110*25
Basket Material	Aluminum
Net Weight	13.9 Kg.

AD-18X1240ES



Max Power

2400 W

Voice Coil

100mm / 4"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	1200 W
Magnet	220*110*25 / Y35
Basket Material	Aluminum
Gross Weight	15.2 Kg.

AD-18X1560ES



Max Power

3600 W

Voice Coil

115mm / 4.5"

Sensitivity

97 ± 2dB

Frequency Range

40Hz ~ 1500Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.1 Ω
Power RMS	1800 W
Magnet	250*140*25 / Y35
Basket Material	Aluminum
Gross Weight	17.5 Kg.

AD-18X1520ES



Max Power

3600 W

Voice Coil

114.5mm / 4.5"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.1 Ω
Power RMS	1800 W
Magnet	253*140*30 / Y35
Basket Material	Aluminum
Gross Weight	17.1 Kg.

AD-1875ES



Max Power

4400 W

Voice Coil

127mm / 5"

Sensitivity

95 ± 2dB

Frequency Range

40Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 6.8 Ω
Power RMS	2200 W
Magnet	280*140*25 / Y35
Basket Material	Aluminum
Net Weight	20.8 Kg.

AD-1895ES



Max Power

5000 W

Voice Coil

127mm / 5"

Sensitivity

96 ± 2dB

Frequency Range

40Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 6.2 Ω
Power RMS	2500 W
Magnet	280*140*50 / Y35
Basket Material	Aluminum
Gross Weight	27.4 Kg.

AD - 18X1570ES



Nominal Diameter
18"/465 Inch/MM

Voice Coil
4.5" In/Out Inch

Sensitivity
94db

Frequency
36Hz~1.6KHz

Gross WT	18.8 KG
Impedance	8Ω Ohms
Power MAX	3600 Watts
Power RMS	1800 Watts
Magnet	250*140*25

DJ SERIES

AD-15X1020ES

**Max Power**

2000 W

Voice Coil

99.2mm / 4"

Sensitivity

98 ± 2dB

Frequency Range

45Hz ~ 3000Hz

Nominal Diameter	15" / 393 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	1000 W
Magnet	220*110*25/ Y35
Basket Material	Aluminum
Gross Weight	12.8 Kg.

AD-15X1050ES

**Max Power**

2400 W

Voice Coil

4.5" / 114.5mm

Sensitivity

97dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	15" / 393mm
Impedance	8 Ω / 5.4 Ω
Power RMS	1200 W
Magnet	253*140*25/ Y35
Basket Material	Aluminum
Gross Weight	17.9 Kg.

AD-15X410ES

**Max Power**

800 W

Voice Coil

75.8mm / 3"

Sensitivity

97 ± 2dB

Frequency Range

45Hz ~ 3000Hz

Nominal Diameter	15" / 393 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	400 W
Magnet	190*85*20 / Y35
Basket Material	Aluminum
Gross Weight	7.4 Kg.

AD-15X510ES

**Max Power**

1000 W

Voice Coil

86.5mm / 3.5"

Sensitivity

98 ± 2dB

Frequency Range

45Hz ~ 3000Hz

Nominal Diameter	15" / 393 mm
Impedance	8 Ω / 4.8 Ω
Power RMS	500 W
Magnet	190*95*25 / Y35
Basket Material	Aluminum
Gross Weight	8.9 Kg.

AD-18SW115ES



Max Power
3600W

Voice Coil
114.5mm/ 4.5" In

Sensitivity
98 ± 2dB

Frequency Range
35Hz to 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.3 Ω
Power RMS	1800W
Magnet	250*140*25 / Y35
Basket Material	Aluminum
Gross Weight	11.0 kg

AD-18X1520ES



Max Power
3600 W

Voice Coil
114.5mm / 4.5"

Sensitivity
98 ± 2dB

Frequency Range
35Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.1 Ω
Power RMS	1800 W
Magnet	253*140*30 / Y35
Basket Material	Aluminum
Gross Weight	17.1 Kg.

DRIVER COMPONENTS

AD-10MD26



Max Power
800 W

Voice Coil
75.5 mm / 3"

Sensitivity
98 ± 2dB

Frequency Range
61Hz ~ 3800Hz

Nominal Diameter	10" / 262 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	400 W
Magnet	180*85*20 / Y35
Basket Material	Aluminum
Gross Weight	5.4 Kg.

AD-10N76



Max Power
800 W

Voice Coil
75.8 mm / 3"

Sensitivity
96 ± 2dB

Frequency Range
75Hz ~ 5500Hz

Nominal Diameter	10" / 262 mm
Impedance	8 Ω / 6.8 Ω
Power RMS	400 W
Magnet	70*12 / N45
Basket Material	Aluminum
Gross Weight	3.2 Kg.

AD-12N351



Max Power

1200 W

Voice Coil

86.5mm / 3.5"

Sensitivity

97 ± 2dB

Frequency Range

46Hz ~ 3500Hz

Nominal Diameter	12" / 320 mm
Impedance	8 Ω / 5.3 Ω
Power RMS	600 W
Magnet	80*10 / N45
Basket Material	Aluminum
Gross Weight	4.9 Kg.

AD-12ND76



Max Power

1000 W

Voice Coil

75.8mm / 3"

Sensitivity

98 ± 2dB

Frequency Range

46Hz ~ 5500Hz

Nominal Diameter	12" / 310 mm
Impedance	8 Ω / 6.8 Ω
Power RMS	500 W
Magnet	25*12*12/ N45
Basket Material	Aluminum
Gross Weight	4.4 Kg.

AD-12X201FG



Max Power

4400 W

Voice Coil

127mm / 5"

Sensitivity

95 ± 2dB

Frequency Range

40Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 6.8 Ω
Power RMS	2200 W
Magnet	280*140*25/ Y35
Basket Material	Aluminum
Net Weight	20.8 Kg.

AD-12X302M



Max Power

600 W

Voice Coil

60.6mm 2.5"

Sensitivity

97 ± 2dB

Frequency Range

55Hz ~ 4000Hz

Nominal Diameter	12" / 310 mm
Impedance	8 Ω / 5 Ω
Power RMS	300 W
Magnet	169*80*20 / Y35
Basket Material	Aluminum
Gross Weight	4.8 Kg.

AD-12X403M

**Max Power**

800 W

Voice Coil

75.8 mm / 3"

Sensitivity

96 ± 2dB

Frequency Range

55Hz ~ 3000Hz

Nominal Diameter	12" / 320 mm
Impedance	8 Ω / 6.2 Ω
Power RMS	400 W
Magnet	190*90*20 / Y35
Basket Material	Aluminum
Gross Weight	7.0 Kg.

AD-12X507MB

**Max Power**

1000 W

Voice Coil

86.5 mm / 3.5"

Sensitivity

96 ± 2dB

Frequency Range

45Hz ~ 3000Hz

Nominal Diameter	12" / 320 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	500 W
Magnet	190*95*20 / Y35
Basket Material	Aluminum
Gross Weight	6.1 Kg.

AD-12X604MG

**Max Power**

1200 W

Voice Coil

100 mm / 4"

Sensitivity

97 ± 2dB

Frequency Range

45Hz ~ 4500Hz

Nominal Diameter	12" / 312 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	600 W
Magnet	220*110*20 / Y35
Basket Material	Aluminum
Net Weight	9.4 Kg.

AD-1580PD AVENGER

**Max Power**

3000 W

Voice Coil

127 mm / 5"

Sensitivity

96.5 ± 2dB

Frequency Range

40Hz ~ 3000Hz

Nominal Diameter	15" / 390 mm
Impedance	8 Ω / 6.2 Ω
Power RMS	1500 W
Magnet	280*140*25 / Y35
Basket Material	Aluminum
Gross Weight	18.3 Kg.

AD-15X350MG

**Max Power**

700 W

Voice Coil

75.5mm / 3"

Sensitivity

96 ± 2dB

Frequency Range

40Hz ~ 3000Hz

Nominal Diameter	15" / 388 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	350 W
Magnet	170*86*20 / Y35
Basket Material	Aluminum
Gross Weight	5.4 Kg

AD-15X401M

**Max Power**

800 W

Voice Coil

75.8mm / 3"

Sensitivity

98 ± 2dB

Frequency Range

38Hz ~ 4500Hz

Nominal Diameter	15" / 393 mm
Impedance	8 Ω / 5.3 Ω
Power RMS	400 W
Magnet	190*90*20 / Y35
Basket Material	Aluminum
Gross Weight	7.6 Kg.

AD-15X404M

**Max Power**

800 W

Voice Coil

75.5mm / 3"

Sensitivity

98 ± 2dB

Frequency Range

42Hz ~ 3000Hz

Nominal Diameter	15" / 388 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	400 W
Magnet	190*85*20 / Y35
Basket Material	Aluminum
Net Weight	7.0 Kg.

AD-15X508MB

**Max Power**

1000 W

Voice Coil

86.5mm / 3.5"

Sensitivity

96 ± 2dB

Frequency Range

40Hz ~ 2500Hz

Nominal Diameter	15" / 393 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	500 W
Magnet	190*95*20 / Y35
Basket Material	Aluminum
Gross Weight	6.7 Kg.

AD-15X600G



Max Power

1200 W

Voice Coil

100mm / 4"

Sensitivity

100 ± 2dB

Frequency Range

49Hz ~ 2800Hz

Nominal Diameter	15" / 395 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	600 W
Magnet	220*110*25/Y35
Basket Material	Aluminum
Gross Weight	12.0 Kg.

AD-1852PD CHROME



Max Power

4000W

Voice Coil

75.8mm / 3"

Sensitivity

98 ± 2dB

Frequency Range

42Hz ~ 2000Hz

Nominal Diameter	18" / 487 mm
Impedance	8Ω / 5.6Ω
Power RMS	2000 W
Magnet	190*90*20 / Y35
Basket Material	Aluminum
Gross Weight	20.1kg

AD-1864PD AVENGER



Max Power

4800 W

Voice Coil

135mm / 5.5"

Sensitivity

97.5 ± 2dB

Frequency Range

35Hz ~ 2500Hz

Nominal Diameter	18" / 460 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	2400 W
Magnet	280*140*25 / Y35
Basket Material	Aluminum
Net Weight	22.4 Kg.

AD-1878PD AVENGER



Max Power

5600 W

Voice Coil

135mm / 5.5"

Sensitivity

97.5 ± 2dB

Frequency Range

35Hz ~ 2500Hz

Nominal Diameter	18" / 460 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	2800 W
Magnet	280*140*40 / Y35
Basket Material	Aluminum
Gross Weight	24.6 Kg.

AD-1882PD CHROME



Max Power

5000 W

Voice Coil

152mm / 6"

Sensitivity

96 ± 2dB

Frequency Range

50Hz ~ 1000Hz

Nominal Diameter	18" / 487 mm
Impedance	8 Ω / 5.2 Ω
Power RMS	2500 W
Magnet	330*170*30 / Y35
Basket Material	Aluminum
Gross Weight	28.7 Kg.

AD-18D1500



Max Power

3000W

Voice Coil

100mm / 4"

Sensitivity

97 ± 2dB

Frequency Range

40Hz ~ 1500Hz

Nominal Diameter	18" / 476 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	1500 W
Magnet	220*110*40/ Y35
Basket Material	Aluminum
Gross Weight	17.3 Kg.

AD-18TBW100



Max Power

3000 W

Voice Coil

100mm / 4"

Sensitivity

96 ± 2dB

Frequency Range

40Hz ~ 2500Hz

Nominal Diameter	18" / 460 mm
Impedance	8 Ω / 5.2 Ω
Power RMS	1500 W
Magnet	220*110*30/ Y35
Basket Material	Aluminum
Net Weight	14.9 Kg.

AD-18X1501S



Max Power

3600 W

Voice Coil

114.5mm / 4.5"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	18" / 460 mm
Impedance	8 Ω / 5.4 Ω
Power RMS	1800 W
Magnet	253*140*30 / Y35
Basket Material	Aluminum
Gross Weight	17.1 Kg.

AD-18X1000G



Max Power

2400 W

Voice Coil

100mm / 4"

Sensitivity

98 ± 2dB

Frequency Range

36Hz ~ 2000Hz

Nominal Diameter	18" / 465 mm
Impedance	8 Ω / 5.6 Ω
Power RMS	1200 W
Magnet	220*110*25/Y35
Basket Material	Aluminum
Gross Weight	12.9 Kg.

AD-18X1505LF



Max Power

3000 W

Voice Coil

100mm / 4"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	18" / 461 mm
Impedance	8 Ω / 5.4 Ω
Power RMS	1500 W
Magnet	220*110*25 / Y35
Basket Material	Zinc Alloy
Gross Weight	11.9 Kg.

AD-18X2210S



Max Power

4400 W

Voice Coil

130 mm / 5.3"

Sensitivity

97 ± 2dB

Frequency Range

44Hz ~ 2000Hz

Nominal Diameter	18" / 463 mm
Impedance	8 Ω / 5.1 Ω
Power RMS	2200 W
Magnet	280*140*25 / Y35
Basket Material	Aluminum
Net Weight	20.1 Kg.

AD-2160PD CHROME



Max Power

5000 W

Voice Coil

152mm / 6"

Sensitivity

96 ± 2dB

Frequency Range

37Hz ~ 1500Hz

Nominal Diameter	21" / 568 mm
Impedance	8 Ω / 5.4 Ω
Power RMS	2500 W
Magnet	330*170*30/ Y35
Basket Material	Aluminum
Gross Weight	30.6 Kg.

AD-2182PD AVENGER



Max Power

7600 W

Voice Coil

152mm / 6"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	21" / 550 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	3800 W
Magnet	300*170*50 / Y35
Basket Material	Aluminum
Gross Weight	32.6 Kg.

AD-21NW151



Max Power

6000 W

Voice Coil

152mm / 6"

Sensitivity

97 ± 2dB

Frequency Range

30Hz ~ 1500Hz

Nominal Diameter	21" / 570 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	3000 W
Magnet	145*60*15 / N45
Basket Material	Aluminium
Gross Weight	21.2 Kg.

AD-21SW152



Max Power

6400 W

Voice Coil

152mm / 6"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	21" / 550 mm
Impedance	8 Ω / 5.3 Ω
Power RMS	3200 W
Magnet	150*50*15 / N45
Basket Material	Aluminum
Net Weight	15.2 Kg.

AD-2184PD



Max Power

7600 W

Voice Coil

152mm / 6"

Sensitivity

98 ± 2dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	21" / 550 mm
Impedance	8 Ω / 5.8 Ω
Power RMS	3800 W
Magnet	300*170*50 / Y35
Basket Material	Aluminum
Gross Weight	37.8 Kg.

15X825G



Max Power

1600 W

Voice Coil

4 In/Out

Sensitivity

100dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	15" / 390 mm
Impedance	8 Ω
Power RMS	800 W
Magnet	220*110*25mm
Basket Material	Aluminum
Gross Weight	133 Kg.

AD-1886PD Pro



Max Power

6000 W

Voice Coil

6 In/Out

Sensitivity

96dB

Frequency Range

35Hz ~ 2000Hz

Nominal Diameter	18" / 487 mm
Impedance	8 Ω
Power RMS	3000 W
Magnet	330*170*30mm
Basket Material	Aluminum
Gross Weight	32.1 Kg.

AD-15X1150SR



Max Power

2300W

Voice Coil

4" (99.2mm)

Sensitivity

98±2dB

Frequency Range

45Hz-3kHz

Nominal Diameter	15" (393mm)
Impedance	8Ω / 5.3Ω
Power RMS	1150W
Magnet	220*110*25/Y35
Basket Material	Aluminum
Gross Weight	12.8KG

AD - 18X1502S



Nominal Diameter
18"/467 lchn/MM

Voice Coil
4.5" In/Out+4Layer Inch

Sensitivity
94db

Power Max
4000w

Gross WT	16.1 KG
Impedance	8Ω
Power RMS	2000W
Magnet	250*140*25

FERRITE DRIVER

750K



Mag. Material

Strontium Ferrite
Y35

Voice Coil

74.5mm/ 3" CCAR

Sensitivity

108±2db

Frequency Range

800Hz-20KHz

Throat Diameter	50mm/ 2 Inch
Impedance	8Ω/6.2Ω
Watts (RMS)	120w

850K



Mag. Material

Strontium Ferrite
Y35

Voice Coil

74.5mm/ 3" CCAR

Sensitivity

108 ±2db

Frequency Range

800Hz-20KHz

Throat Diameter	50mm/ 2 Inch
Impedance	8Ω/6.2Ω
Watts (RMS)	120w

AD-450S



Mag. Material

Strontium Ferrite
Y35

Voice Coil

44.4mm/1.75" CCAW

Sensitivity

106 ± 2db

Frequency Range

1.5Hz-20KHz

Throat Diameter	25mm/1 Inch
Impedance	80/60
Watts (RMS)	60w

AD-550C



Mag. Material

Strontium Ferrite
Y35

Voice Coil

51.3mm/ 2" CCAW

Sensitivity

108 ± 2db

Frequency Range

1.2Hz-20KHz

Throat Diameter	25.4mm/ 1 Inch
Impedance	8Ω/ 7Ω
Watts (RMS)	80w

AD-560S

**Mag. Material**

Strontium Ferrite
Y35

Voice Coil

51.3mm/2" CCAW

Sensitivity

108 ± 2db

Frequency Range

1.2Hz-20KHz

Throat Diameter	25.4mm/1 Inch
Impedance	8 Ω / 7 Ω
Watts (RMS)	80w

AD-7245

**Mag. Material**

Strontium Ferrite
Y35

Voice Coil

72.5mm/3" CCAW

Sensitivity

108 ± 2db

Frequency Range

800Hz-20KHz

Throat Diameter	50mm/2 Inch
Impedance	8 Ω / 6.2 Ω
Watts (RMS)	120w

AD-850N

**Mag. Material**

Strontium Ferrite
Y35

Voice Coil

3" (74.5mm) CCAR

Sensitivity

108dB ±2dB

Frequency Range

800Hz-20kHz (±3dB)

Throat Diameter	2" (50mm)
Impedance	8Ω / 6.2Ω
Watts (RMS)	140W

AD-551XLS

**Mag. Material**

Strontium Ferrite
Y35

Voice Coil

51.3 mm / 2"

Sensitivity

108 ± 2dB

Frequency Range

800Hz ~ 16000Hz

Throat Diameter	25 mm / 1 inch
Impedance	8 Ω / 6.5 Ω
Watts (RMS)	100 W

AD-761XLS



Mag. Material
Strontium Ferrite
Y35

Voice Coil
51.3 mm 2"

Sensitivity
108 ± 2dB

Frequency Range
800Hz ~ 16000Hz

Throat Diameter 25 mm / 1 inch

Impedance 8 Ω / 7 Ω

Watts (RMS) 100 W

751LEX



Mag. Material
Strontium Ferrite
Y35

Voice Coil
72.5 mm / 3"

Sensitivity
108 ± 2dB

Frequency Range
800Hz ~ 20000Hz

Throat Diameter 50 mm / 2 inch

Impedance 8 Ω / 6 Ω

Watts (RMS) 140 W

AD-7242



Mag. Material
Strontium Ferrite
Y35

Voice Coil
72.5mm 3"

Sensitivity
108 ± 2dB

Frequency Range
800Hz ~ 20000Hz

Throat Diameter 50 mm / 2 inch

Impedance 8 Ω / 6.2 Ω

Watts (RMS) 120 W

AD-750TN



Mag. Material
Strontium Ferrite
Y35

Voice Coil
74.5mm / 3"

Sensitivity
108 ± 2dB

Frequency Range
800Hz ~ 20000Hz

Throat Diameter 50 mm / 2 inch

Impedance 8 Ω / 6.2 Ω

Watts (RMS) 140 W

AD-561XLS

**Mag. Material**

Strontium Ferrite
Y35

Voice Coil

51.3 mm 2"

Sensitivity

108 ± 2dB

Frequency Range
800Hz ~ 16000Hz

Throat Diameter	25 mm / 1 inch
Impedance	8 Ω / 7 Ω
Watts (RMS)	100 W

AD-440C

**Mag. Material**

Strontium Ferrite
Y35

Voice Coil

72.5 mm / 3"

Sensitivity

108 ± 2dB

Frequency Range
800Hz ~ 20000Hz

Throat Diameter	50 mm / 2 inch
Impedance	8 Ω / 6.2 Ω
Watts (RMS)	120 W

NEODYMIUM DRIVER

780TN



**Diaphragm Compression
Driver Model - 3"**

Impedance
8 ohm

Power RMS
120 Watts

AD-2408H



Mag. Material
Strontium Ferrite
Y35

Voice Coil
38 mm / 1.5"

Sensitivity
108 ± 2dB

Frequency Range
900Hz ~ 18000Hz

Throat Diameter	25 mm / 1 inch
Impedance	8 Ω / 6.2 Ω
Watts (RMS)	60 W

ADX-D2



**Diaphragm Compression
Driver Model - 3"**

Impedance
8 ohm

Power RMS
160 Watts

AD-400TN



Mag. Material
Strontium Ferrite
Y35

Voice Coil
38 mm / 1.5"

Sensitivity
108 ± 2dB

Frequency Range
900Hz ~ 18000Hz

Throat Diameter	25 mm / 1 inch
Impedance	8 Ω / 6.2 Ω
Watts (RMS)	60 W

AD-800TN

**Mag. Material**

Strontium Ferrite
Y35

Voice Coil

74.5mm / 3"

Sensitivity

108 ± 2dB

Frequency Range

800Hz ~ 20000Hz

Throat Diameter	36 mm / 1.5 inch
Impedance	8 Ω / 6.5 Ω
Watts (RMS)	140 W

SUPER PRESSURE MID DRIVER

AD-4599

**RMS Power**

120w

Voice Coil

89mm/3.5"

Sensitivity

123±2dB

Frequency Range

200Hz-9KHz

Diameter	50mm/2 Inch
----------	-------------

Impedance	8 Ω / 6.2 Ω
-----------	-------------

AD-4599EX PRO

**Max Volume**

160W/1m/35.7V
135dB

Voice Coil

200Hz ~ 8000Hz

Sensitivity

2X1W/1m 123dB

Frequency Range

200Hz ~ 8000Hz

Throat Diameter	50.8 mm / 2 inch
-----------------	------------------

Impedance	2x 16 Ω
-----------	---------

Watts (RMS)	120w
-------------	------

AD-6599ex



Power
650w

Voice Coil
2x99.2mm

Sensitivity
123dB

Frequency Range
200-7000Hz

Diameter	2"(50.8mm)
----------	------------

Impedance	2x16Ω
-----------	-------

Impedance	4.6kg
-----------	-------

AD-4599HD



Power
450 Watt

Impedance
8Ω

AMPLIFIERS



ADJ - 801

8Ω Stereo	2x680W	Input Impedance	20K Ω
4Ω Stereo	2x900W	Cross Talk	>90dB@1KHz
8Ω Bridge	1500W	Damping Factor	600
4Ω Bridge	1800W*	Rack Space	2U
Output Circuitry	class H	Net Weight	22.5Kg.
Frequency Respons	20-20KHz (±0.3dB)	Gross Weight	25.5KG
Input Sensitivity	0.775V/1.0V/1.4V		



RL - 3800AD

8Ω Stereo	2x800W	Input Impedance	20K Ω
4Ω Stereo	2x1100W	Cross Talk	>90dB@1KHz
8Ω Bridge	2200W	Damping Factor	800
4Ω Bridge	2700W*	Rack Space	2U
Output Circuitry	class H	Net Weight	24Kg.
Frequency Respons	20-20KHz (±0.3dB)	Gross Weight	27.5Kg.
Input Sensitivity	0.775V/1.0V/1.4V	2Ω Stereo	2x1400W



RL - 4600AD

8Ω Stereo	2x1000W
4Ω Stereo	2x1580W
8Ω Bridge	3110W
4Ω Bridge	3700W*
Output Circuitry	Class H
Frequency Respons	20-20KHz (±0.3dB)
Input Sensitivity	0.775V/1.0V/1.4V

Input Impedance	20K Ω
Cross Talk	>90dB@1KHz
Damping Factor	800
Rack Space	3U
Net Weight	33.5Kg.
Gross Weight	38Kg.
2Ω Stereo	2x1950W



RL-5700AD

8Ω Stereo	2x1200W
4Ω Stereo	2x1950W
8Ω Bridge	3750W
4Ω Bridge	4650W*
Output Circuitry	class H
Frequency Respons	20-20KHz (±0.3dB)
Input Sensitivity	0.775V/1.0V/1.4V

Input Impedance	20K Ω
Cross Talk	>90dB@1KHz
Damping Factor	1000
Rack Space	3U
Net Weight	33.5Kg.
Gross Weight	38KG
2Ω Stereo	2x2400W



RL-7000AD

8Ω Stereo	2x1450W
4Ω Stereo	2x2280W
8Ω Bridge	4500W
4Ω Bridge	5300W*
Output Circuitry	Class H
Frequency Respons	20-20KHz (±0.3dB)
Input Sensitivity	0.775V/1.0V/1.4V

Input Impedance	20K Ω
Cross Talk	>90dB@1KHz
Damping Factor	1200
Rack Space	3U
Net Weight	36Kg.
Gross Weight	40Kg.
2Ω Stereo	2x2680W



RL-7800AD

8Ω Stereo	2x1850W
4Ω Stereo	2x2950W
8Ω Bridge	5800W
4Ω Bridge	7800W*
Output Circuitry	class H
Frequency Respons	20-20KHz (±0.3dB)
Input Sensitivity	0.775V/1.0V/1.4V

Input Impedance	20K Ω
Cross Talk	>90dB@1KHz
Damping Factor	1300
Rack Space	3U
Net Weight	44Kg.
Gross Weight	48.5KG
2Ω Stereo	2x3800W



BDT-8800AD

8Ω Stereo	4x920W
4Ω Stereo	4x1450W
8Ω Bridge	2x1800W
4Ω Bridge	2x2800W
Output Circuitry	Class H
Frequency Respons	20– 20KHz (±0.3dB)
Input Sensitivity	0.775V/1.0V/1.4V

Input Impedance	20K Ω
Cross Talk	>90dB@1KHz
Damping Factor	800
Rack Space	2U
Net Weight	27Kg.
Gross Weight	30.5Kg.



BDT-8800Pro

8Ω Stereo	4x920W
4Ω Stereo	4x1450W
8Ω Bridge	2x1800W*
4Ω Bridge	2800W
Output Circuitry	class H
Frequency Respons	20Hz-20KHz±0.5dB
Input Sensitivity	0.775V/1.0V/1.4V

Input Impedance	20kΩ / 10kΩ
Cross Talk	>65dB 80 1KHz
Damping Factor	>800
Rack Space	3U
Net Weight	28.5KG
Gross Weight	32KG
THD %	0.05%



ADT-8850

8Ω Stereo	4 × 1500W
4Ω Stereo	4 × 1680W
8Ω Bridge	2 × 1950W
4Ω Bridge	2 × 3150W*
Output Circuitry	Class D/HD
Frequency Respons	20 – 20kHz (±0.3dB)
Input Sensitivity	0.775V / 26dB / 32dB

Input Impedance	20K Ω
Cross Talk	>90dB@1KHz
Damping Factor	≥700
Rack Space	2U
Net Weight	27.5 kg
THD	0.03% @ 8Ω
S/N Ratio	≥103dB



ADMT-1602

8Ω Stereo	2x1800W
4Ω Stereo	2x2800W
8Ω Bridge	5600W
4Ω Bridge	7000W*
Output Circuitry	class H
Frequency Respons	20-20KHz+0/-1dB
Input Sensitivity	0.775V/1.0V/1.4V

Input Impedance	20K Ω
Cross Talk	≤62dB 8Ω 1KHz
Damping Factor	≥1300
Rack Space	3U
Net Weight	39.5Kg.
Gross Weight	42.5KG
2Ω Stereo	2x3500W*



ADMT - 1802

8Ω Stereo	2x2200W
4Ω Stereo	2x3700W
8Ω Bridge	6400W
4Ω Bridge	8200W*
Output Circuitry	Class D/HD
Frequency Respons	20Hz-20KHz+0/-1 dB
Input Sensitivity	0.75V/1.0/1.4V

Input Impedance	20K Ω
Cross Talk	≤62dB 8Ω 1KHz
Damping Factor	≥1800
Rack Space	3U
Net Weight	39.5Kg.
THD	0.05%@8Ω
2Ω Stereo	2x4050W*



AD-9000

8Ω Stereo	2X2100W
4Ω Stereo	2x3850W
8Ω Bridge	4800W
4Ω Bridge	7100W*
Output Circuitry	class H
Frequency Respons	20-20KHz+0/-1 dB
Input Sensitivity	0.75V/1.0/1.4V

Input Impedance	20K Ω
Cross Talk	≤62dB 8Ω 1KHz
Damping Factor	≥3000
THD %	0.05%@8Ω
S/N Ratio	109 dB
Gross Weight	42.5KG
2Ω Stereo	



XH-SERIES (AD-9900)

8Ω Stereo	2x2200W
4Ω Stereo	2x3900W
8Ω Bridge	5000W
4Ω Bridge	7300W*
Output Circuitry	Class D/HD
Frequency Respons	20-190HZ+0/-1dB
Input Sensitivity	0.75V/1.0/1.4V

Input Impedance	20K Ω
Cross Talk	≤62dB 8Ω 1KHz
Damping Factor	≥3500
Rack Space	3U
Gross Weight	39 Kg
THD	0.05%@8Ω
2Ω Stereo	2x5500W*



XX 16000 AD

8Ω Stereo	2 × 4000W
4Ω Stereo	2 × 7000W
8Ω Bridge	8900W
Output Circuitry	Class D/HD
Frequency Respons	20-300KHz±0.3dB

Damping Factor	>3500
2Ω Stereo	2 × 8100W*
4Ω Bridge	14200W*



XX-14000AD

8Ω Stereo	2 × 3200W
4Ω Stereo	2 × 6000W
8Ω Bridge	7100W
4Ω Bridge	9500W*
Output Circuitry	Class D/HD
Frequency Respons	20–300Hz (±0.3dB)
Input Sensitivity	0.775V / 1.0V / 1.5V

Input Impedance	20K Ω
Cross Talk	≤62dB 8Ω 1KHz
Damping Factor	≥3500
Rack Space	3U
Gross Weight	49 kg
THD	0.05% @ 8Ω
2Ω Stereo	2 × 7100W*



XX-1200AD

8Ω Stereo	2 × 2800W
4Ω Stereo	2 × 5600W
8Ω Bridge	6200W
4Ω Bridge	8900W*
Output Circuitry	Class D/HD
Frequency Respons	20–300Hz (±0.3dB)
Input Sensitivity	0.775V / 1.0V / 1.5V

Input Impedance	20K Ω
Cross Talk	≤62dB 8Ω 1KHz
Damping Factor	≥3500
THD %	0.05% @ 8Ω
S/N Ratio	≥100dB
Gross Weight	45 kg
2Ω Stereo	2 × 6200W*



XX-10200AD

8Ω Stereo	2 × 2250W	4Ω Bridge	7500W
4Ω Stereo	2 X 4000W	Output Circuitry	Class D/HD
8Ω Bridge	5400W	Frequency Respons	10–300Hz /±0.3DB



ADMT - 2202

8Ω Stereo	2 × 3200W	Damping Factor	≥1800
4Ω Stereo	2 × 4700W	4Ω Bridge	9500W*
8Ω Bridge	7400W	2Ω Stereo	2 × 5800W

6006 - AD



8Ω Stereo	4x620W	S/N Ratio	109db
4Ω Stereo	4X910W	Damping Factor	900
2Ω Stereo	4X1180W	THD%	0.02%
4Ω Bridge	2X1680W	Rack Space	1.5V
2Ω Bridge	2X2300W	Net Weight	12.8kg
Output Circuitry	Class D/PDM	Input Sensitivity	0.775v/1v/1.4v
Frequency Response	20Hz – 20KHz±0.3dB		

CROSSOVER



AD-234XS

Input Connectors	XLR
Input Type	Electronically balanced/unbalanced, RF filtered
Input Impedance	Balanced >50k ohm, unbalanced >25k ohm
Max Input	>+22dBu balanced or unbalanced
CMRR	>40dB, typically >55dB at 1kHz
Output Connectors	XLR
Output Impedance	Balanced 60 ohm, unbalanced 30 ohm
Max Output	Impedance-balanced/unbalanced, RF filtered
Bandwidth	20Hz to 20kHz, +/-0.5dB
Frequency Response	< 3 Hz to > 90 kHz, +0/-3 dB
Signal to Noise Ratio	Ref: +4 dBu, 22 kHz measurement bandwidth
Dynamic Range	> 106 dB, unweighted, any output
THD+Noise	< 0.004% at +4 dBu, 1 kHz; < 0.04% at +20 dBu, 1 kHz
Crossover Frequencies	Low/Mid: 45 to 960 Hz or 450 Hz to 9.6 kHz (x10 setting); Low/High: 45 to 960 Hz or 450 Hz to 9.6 kHz (x10 setting); Mid/High 450Hz to 9.6kHz (x10 setting)
Operating Voltage	230 VAC 50/60Hz
Net Weight	1.8 Kg.
Gross Weight	2.6 Kg.



AD-201DiSi

2 In / 10 Out Distribution	Input Imp: 50kΩ(Bal), 25kΩ(unbal)
Stereo/Mono Input Option	Output Imp: 220Ω(Unbal)
Individual Output Gain Control	Freq Responce: 0.35Hz-220Hz (+0/-3dB)
XLR/TRS Combo Inputs	SNR: >100Bu(22Hz-22kHz)
XLR/TRS Combo Outputs	THD:0.04%@4dBu,1kHz
Ultra-Low Harmonic Distortion	



SR462-AD

Dual 31 Band Graphic Equalizer	EQ Bypass switch
Subwoofer Output With Crossover	Range +12 dB or +6 dB select Option
Constant "Q" design	18 dB / octave Highpass Filter
20 Hz – 20 kHz	Signal / Clip indicator
Full band support	Balanced XLR - TRS input
1/3 Octave Bandwidth	



AD260

Input Imp.	40k Ohm	Dynamic Range	10 dB / >107dB
Frequency	20Hz - 20kHz, +/-0.5	Max Input	+30dBu+30 Position
Max Output	+22dBu		



SR - 430QX

Dual 15-Band EQ	<ul style="list-style-type: none"> • 20mm faders • Input Impedance: 40kΩ (Bal), 20kΩ (Unbal)
<ul style="list-style-type: none"> • Constant Q Design • 50Hz Low-Cut, 12dB/Oct • Balanced XLR In/Out 	
<ul style="list-style-type: none"> • Balanced 1/4In, Impedance-Balanced Out • ISO 2/3 Octave Centers 	<ul style="list-style-type: none"> • Max Output: +21 dBu (Bal/Unbal) • THD: 0.006% @1kHz • S/N Ratio: >90 dB (ref. 0.0775Vrms) • Switching: FET In/Out & Filter

DJ MIXER



DDJ-3

FEATURES

- Replaceable crossfader with reverse and normal slope controls
- Two switchable phono/line inputs plus one more dedicated line input giving a total of 5 inputs
- Master and Booth Outputs and three band EQ on each channel
- Balanced XLR and Unbalanced RCA Outputs
- USB 2.0 in USB version

FEATURES

- 6 MONO and XLR inputs and 2 stereo inputs
- Selectable 48V phantom power supply in each channel
- Equipped with PAD and MUTE button in each channel
- High, Mid, Low EQ adjustments in each channel
- Two AUX output
- 7 bands EQ in stereo main output
- Multi-functional Mp3
- Equipped with High and Low EQ adjustments in Mp3
- Built-in Soundcard function with PC & Phone recording
- 32 BIT effector with 24 kinds of DSP + Analog Effect
- Equip with EQ IN to turn On/Off to main output
- 60 mm fader
- FX to AUX



RA-8



M5 PRO

FEATURES

- Three channels with three-band rotary EQ and gain controls
- Phono/line and switchable RCA inputs for connecting CD players, digital music players, and turntables
- 1/4*(6.3mm)microphone input for performing,MCing, and making announcements
- 1/4"(6.3 mm)stereo headphone output for cueing and auditioning mixes
- Mic channel with dedicated two-band rotary EQ and gain controls
- Stereo RCA outputs to connect an amplifier, powered speakers, or another mixer
- Six-segment LED display for real-time visual monitoring
- PFL control for toggling between master and PFL metering
- Replaceable crossfader with reverse and slope controls
- XLR Balanced Stereo output for Professional Amplifier, Powered speaker, Another Mixer

FEATURES

- 10 MONO and XLR inputs and 2 stereo inputs
- High, Mid, Low EQ adjustments in each channel
Two AUX output
- 7 bands EQ in stereo main output
Multi-functional Mp3
- 60 mm fader
- Built-in Soundcard function with PC & Phone recording
- Selectable 48V phantom power supply in each channel
- Equipped with PAD and MUTE button in each channel
- Equipped with High and Low EQ adjustments in Mp3
- 32 BIT effector with 24 kinds of DSP + Analog Effect
Equip with EQ IN to turn On/Off to main output



RA-12

FEATURES

●	14 MONO and XLR inputs and 2 stereo inputs
●	High, Mid, Low EQ adjustments in each channel Two AUX output
●	7 bands EQ in stereo main output Multi-functional Mp3
●	60 mm fader
●	Built-in Soundcard function with PC & Phone recording
●	Selectable 48V phantom power supply in each channel
●	Equipped with PAD and MUTE button in each channel
●	Equipped with High and Low EQ adjustments in Mp3 32 BIT effector with 24 kinds of DSP + Analog Effect
●	Equip with EQ IN to turn On/Off to main output



RA-16



EXENT-16AD

FEATURES

●	12 MONO and XLR inputs, 4 stereo inputs.
●	Each output signal strength with LED display
●	With PAD/LOW CUT button on each channel.
●	Freestanding 48V power switch on each channel.
●	With FREQ function adjustments on each channel
●	MUTE button with LED display on each channel.
●	Monitor button with LED display on each channel. Double 99 DSP effectors
●	100 MM fader:
●	ST input channels with three segments EQ adjustments and gain control.
●	Eight AUX outputs (With PRE / POSRT FADER selection).
●	One of ST channel's signal can be sent to AUX outputs. FX TO AUX.
●	AUX outputs with LED display.
●	With soundcard function OTG port, connect with PC or PHONE.
●	MP3 player with bluetooth and recording function.
●	Stereo output and four group outputs.
●	Side panel with LED display.

FEATURES

●	20 MONO and XLR inputs, 4 stereo inputs.
●	Each output signal strength with LED display. With PAD/LOW CUT button on each channel.
●	Freestanding 48V power switch on each channel. With FREQ function adjustments on each channel.
●	MUTE button with LED display on each channel.
●	Monitor button with LED display on each channel
●	Double 99 DSP effectors.
●	100 MM fader
●	ST input channels with three segments EQ adjustments and gain control.
●	Eight AUX outputs(With PRE /POST FADER selection).
●	One of ST channel's signal can be sent to AUX outputs FX TO AUX.
●	AUX outputs with LED display.
●	With soundcard function OTG port ,connect with PC or PHONE
●	MP3 player with bluetooth and recording function
●	Stereo output and four group outputs.
●	Side panel with LED display.



EXENT-24AD



PXR-6AD

FEATURES

●	Number of Channels-
●	6
●	Product Dimensions-
●	7D x 22.7W x 24.5H Centimeters
●	Item Weight
●	1.65 Kilograms
●	Connectivity Technology- Auxiliary, Bluetooth, USB
●	Power Source-
●	Corded Electric
●	Versatile 6-Channel Audio Mixer : Mix 4 mono mic /XLR/line inputs + 2 stereo channel—perfect as a compact DJ mixer, small studio mixer, or for live sound setups.
●	Bluetooth & MP3 Integration : Stream audio wirelessly from smartphones or play MP3s via USB—ideal for any digital audio player or portable DJ console.
●	99 Built-in DSP Effects : Customize your sound with 99 digital effects—enhance vocals, instruments, or DJ sets with studio-grade audio processing.

M6 USB



FEATURES

- **Four Input Channels**
The M6 USB DJ Mixer comes with four input channels, each equipped with a gain control, three-band EQ, and LED metering. This provides precise control over each track, allowing you to craft seamless transitions and master your sound with ease.
- **USB Connectivity for Mac and PC**
The built-in USB computer connection allows you to easily connect the M6 mixer to your Mac or PC, letting you play music from your favorite music-player software and record your mix directly to your computer. No complicated setup needed — just plug and play.
- **Multiple Inputs for Flexibility**
With a variety of inputs, including multiple phono, line, and mic inputs, the M6 USB DJ Mixer offers plenty of options for connecting all your gear. Whether you're using vinyl, CDs, or digital sources, this mixer ensures flexibility in your setup.
- **Dedicated XLR Mic Channel**
For those times when you need to talk to the crowd or add a vocal element to your performance, the M6 features a dedicated XLR mic channel, along with an additional mic input on channel 4. This ensures optimal sound quality for any vocal performance.
- **Replaceable Crossfader with Slope Control**
The crossfader is a crucial element in any DJ mixer, and the M6 doesn't disappoint. Its replaceable crossfader with slope control ensures smooth transitions and effortless mixing. Plus, you can assign any channel to either side of the crossfader, offering flexibility and control during performances.
- **Class Compliant and Future-Proof**
One of the standout features of the M6 USB DJ Mixer is that it is class-compliant, meaning it works immediately with every version of Mac OS X and iOS, as well as Windows operating systems from 98SE onward. This ensures that your mixer will be compatible with future updates without hassle.



ATOM - 4

FEATURES

- KEY FEATURES :&amp;amp;amp;amp;amp;amp;lt;br />DUAL
- BLUETOOTH CONNECTIVITY:
The ATOM 4 comes equipped with dual Bluetooth, allowing users to connect two devices simultaneously and mix music wirelessly from smartphones, tablets, or other Bluetooth-enabled devices
- .4-CHANNEL MIXER:
Each channel has individual faders, EQ controls (low, mid, high), and gain knobs, allowing for detailed mixing of multiple sound sources.
- USB INPUTS:
The crossfader features assignable channels and includes slope adjustment for customizing the transition between tracks.
- MULTIPLE INPUT TYPES:
The ATOM 4 supports multiple RCA inputs for connecting external audio devices such as turntables or CD players.
DEDICATED SUBWOOFER CONTROL:<br class="yoast-text-mark" />>On the master output section, there is a subwoofer control knob, enabling direct tuning and gain control over the subwoofer output for enhanced bass performance.
- BALANCED OUTPUTS:
>The mixer provides balanced XLR outputs, ensuring clean audio transmission to speakers, which is crucial for professional use.
CUE AND HEADPHONE MONITORING:
Headphone monitoring options are available with mix/split cue functionality, allowing DJs to preview specific channels in advance of mixing.
- CROSSFADER:
Three USB inputs allow for direct integration with digital devices such as laptops, USB drives, or MIDI controllers.
XLR MICROPHONE INPUTS:
The ATOM 4 includes at least one XLR microphone input for high-quality vocal or announcement integration.


NETWORK



AD-450NW

General Information	1-Way
Output Impedance	8 Ω / 4 Ω
Crossover Frequency	3000 Hz
Slope	12dB / Oct

RMS Power	100 W
Suitable for HF	1 inch, 1.4 inch
Dimensions	100*160*30 mm
Weight	0.199 Kg

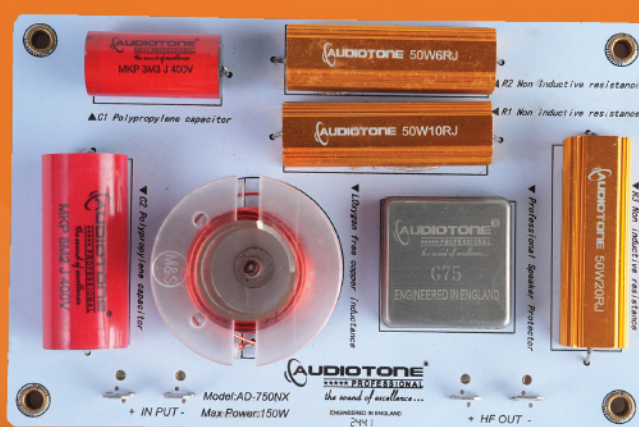

AD-750NX

General Information	1-Way
Output Impedance	8 Ω / 4 Ω
Crossover Frequency	2500 Hz
Slope	12dB / Oct

RMS Power	150 W
Suitable for HF	1.4 inch, 2 inch
Dimensions	100*160*30 mm
Weight	0.199 Kg



450 GF+

Features: Includes professional protection circuitry for the high-frequency component

Key Components Visible

C1 & C2: Polypropylene capacitors (2.2 μ F/400V and 6.8 μ F/400V)

L: Oxygen-free copper inductance (0.32mH)

R1, R2, R3: Non-inductive resistors (50W20RJ, 50W5RJ, 50W20RJ)

Protection: Professional speaker protector circuitry

2-way passive crossover network

Max Power Handling: 150W

Compatibility: Suitable for 8 ohms HF drivers only

Filtering: 18 dB/Octave slope on HF

Features: Includes professional protection circuitry for the high-frequency component


Key Components Visible

C1 & C2: Polypropylene capacitors (8.2 μ F/400V and C1 (3.3 μ F/400V)

L: Oxygen-free copper inductance (0.32mH)

R1 (50W10RJ), R2 (50W20RJ), and R3 (50W6RJ)

Protection: Professional speaker protector circuitry

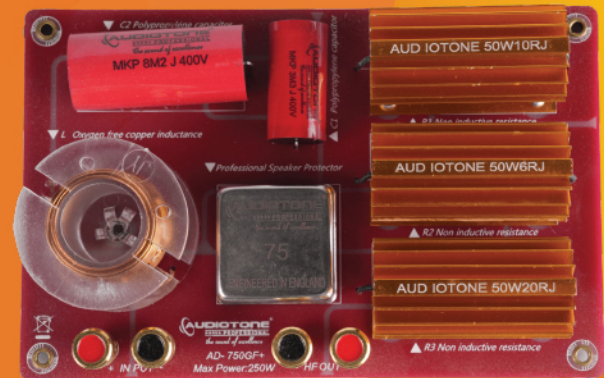


750GF+

2-way passive crossover network

Max Power Handling: 250W

Compatibility: Suitable for 8 ohms HF drivers only

Filtering: 18 dB/Octave slope on HF

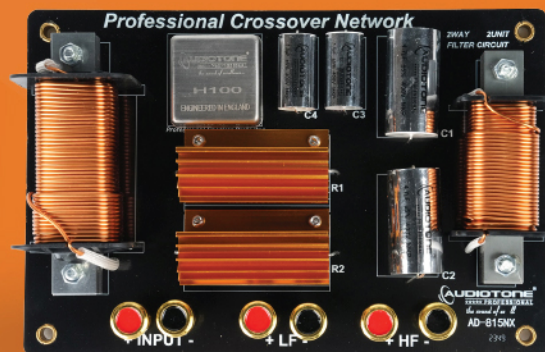

815NX

General Information

1-Way

Output Impedance

8 Ω / 4 Ω

Crossover Frequency

2500 Hz

Slope

12dB

RMS Power

150Wv

Suitable for HF

1 inch, 1.4 inch

Dimensions

100*160*30 mm

Weight

0.199 Kg

MICROPHONES



UHF-450AD

Mute control	Noise Lock
Frequency Response	80Hz 18kHz
Frequency Stability	+/- 0.006%
S/N Ratio	>97dB
Total Harmonic Distor	< 0.02 % @ 1 kHz

Receiving Sensitivity	-80dBm
Operating range	100 meter
Resonance Interference Rate	54 dB
False Image Interference Rate	80dB



UHF-600AD

Carrier Frequency	UHF 440-960MHz
Channels Total	200
Oscillation Mode	IC
T.H.D	<0.5%
Sensitivity	2.0uV
Frequency	35Hz-20KHz±3dB
S/N Ratio	>90dB
Operation Distance	>100m
Power Supply	DC14-22V 500mA
Audio Output Jack	1*6.3mm/2*XLR

Receiver Type	Antenna Diversity
size	210*206*48mm
Transmission Powery	10mW or 5mW
Modulation Mode	IC
Battery Type	*AA
Spurious Rejection	>50dB
Frequency Response	60Hz-15KHz±3dB
Product Size	φ52*245mm
S/N Ratio	>97dB
Total Harmonic Distor	< 0.02 % @ 1 kHz



UHF-950AD

Carrier Frequency	UHF 440-960MHz
Channels Total	200
Oscilltaion Mode	IC
T.H.D	<0.5%
Sensitivity	2.0uV
Frequency	35Hz-20KHz
S/N Ratio	>90dB
Operation Distance	200m
Power Supply	DC14-18V 500mA
Audio Output Jack	1*6.3mm/2*XLR

Receiver Type	Antenna Diversity
size	420*190*43mm
Transmission Powery	10mW or 5mW
Modulation Mode	IC
Battery Type	2*AA
Spurious Rejection	>50dB
Frequency Response	<75KHz
Product Size	φ55*258mm
S/N Ratio	>97dB
Total Harmonic Distor	< 0.02 % @ 1 kHz

LINE ARRAY



AD-12X3LA

Maximum SPL	132dB peak
Response	45Hz-20kHz (± 3 DB)
Power Handling	1600W RMS
Sensitivity	99DB (1W/1m)
Coverage Pattern	100° (H) \times 15° (V)
Compression Driver	2" (3.0" voice coil)
Crossover	1800Hz bi-amp
DSP Controls	Cluster, HF Curve

Width	705mm (27.7")
Depth	445mm (17.5")
Weight	29kg (64lbs)
Cabinet Material	Sound-Grade
Power Supply	1200W Switching
HF Amplifier	Class D (200W)
LF Amplifier	Class D (1000W)
Height	294mm (11.5")



ADX-20

Maximum SPL	132dB peak
Response	45Hz-18kHz (± 3 dB)
Power Handling	1600W RMS
Sensitivity	99DB (1W/1m)
Coverage Pattern	100° (H) \times 15° (V)
Compression Driver	2" (3.0" voice coil)
Crossover	1800Hz bi-amp
DSP Controls	Cluster, HF Curve

Width	705mm (27.7")
Depth	445mm (17.5")
Weight	29kg (64lbs)
Cabinet Material	Sound-Grade
Power Supply	1200W Switching
HF Amplifier	Class D (200W)
LF Amplifier	Class D (1000W)
Height	294mm (11.5")

PA SYSTEMS



STM15PRO-AD

Woofer	15" (75mm Voice Coil)
RMS Power	2200W
Frequency Response	40Hz-20kHz (±3dB)
Impedance	4Ω
Sensitivity	97dB (1W/1m)
DSP Controls	EQ, Delay, Limite
Inputs	1/4" Line
Wireless	Bluetooth 5.0

Physical Dimensions	780×475×470mm
Net Weight	22.5 kg
Gross Weight	25.05 kg
Enclosure	Plastic composite
Included Accessoriesy	Power Cable
User Manual	Optional Flying Hardware



STM15-AD

Woofer	15" (75mm Voice Coil)
RMS Power	2000W
Frequency Response	45Hz-18kHz (±3dB)
Impedance	4Ω
Sensitivity	97dB (1W/1m)
DSP Controls	EQ, Delay, Limite
Inputs	1/4" Line
Wireless	Bluetooth 5.0

Physical Dimensions	780×475×470mm
Net Weight	24 kg
Gross Weight	27.4 kg
Enclosure	Plastic composite
Included Accessoriesy	Power Cable
	User Manual
	Optional Flying Hardware

VOICE COILS



SUPERIOR QUALITY & ATTRACTIVE PRICE

**Largest range in India over
150 Models (25mm - 178mm)**

100% original & imported voice coils

Suitable for higher wattage Speakers

Heat Resistance Raw material Used

As we all know Voice Coils are how important part in a loudspeaker's, but here in Audiotone we are take it very seriously. Why because we have dedicated R&D team with well-equipped modern technology for designing application oriented solutions, continuous testing & analysis which we earned in various years of distribution across the nation.

RECONE KITS



We believe customers relationship in top priority. We ensure timely delivery of Recone kits (Voice Coils, Spiders, Paper Cones etc.) after sales service with immediate replacements.

DIAPHRAGMS



**Largest Range in India over
42 Models (25mm to 99mm)**

100% original & imported Diaphragms

Suitable for higher wattage HF Units

Diaphragms are most complex part in HF compression driver, so we are very strict about quality of diaphragms materials such as voice coil wire, former temperature bearing capacity and high grade titanium or beryllium, to serve subsistence option as good original components for after market demands.



At Audiotone, our experienced team of designers places a high value on technical excellence, product reliability, and consistent electro-acoustical functionality. With 32 years of inspired and deliberate engineering, we have earned nationwide acclaim, particularly from the Indian sound rental community. Our commitment to performance and quality control is unwavering.


Specializing in audio components, especially loudspeaker design and distribution, Audiotone performs most of its engineering and development work in England. Our dedication to quality has established us as the premier choice for state-of-the-art high-end transducers.

We never compromise on product or sound quality, remaining steadfast in our pursuit of perfection. Audiotone is renowned for its commitment to excellence, allowing us to maintain our leading position in the audio industry.

WARNING

In the market spurious /Duplicate sub-standard Amplifiers, Microphones, H.F Drivers, Speakers, Diaphragms and Voice Coils are being passed off as **GENUINE AUDIOTONE PRODUCTS**

BE VERY CAREFUL

- Obtain your requirements from **AUTHORISED AUDIOTONE DEALERS & DISTRIBUTORS** only.
- Insist on seeing the **AUTHORISED DEALER CERTIFICATE &  'TRADE MARK'**.
- Manufacture & sale of Spurious/Duplicate Products is illegal & Punishable under law.

Rampura Road, Dadabari, Sanganer, Jaipur - 302029 (India)
info@audiotone.co.in, www.audiotone.co.in

Scan to download
product catalog



Authorized Dealer